


	3 wire DC	2 wire AC
Assured Sens. Sa	Sn x 0.8	
Sensitivity Adj.	Multi turn pot (optional)	
Body Material	Brass / Plastic	
Function	NO / NC	
Switching Freq.	100 Hz	25 Hz
Load Current	100 mA	100 mA
Output Indicator	LED	
Supply Voltage	10 ... 30 V DC	20 ... 250 V AC
SC Protection	Yes	
RP Protection	Yes	
Operating Temp.	-25 ... +70 deg C	
Protection	IP65	
Connection	2 m PVC cable	



Pictures for illustration only.  
Design and specifications subject to change without prior notice

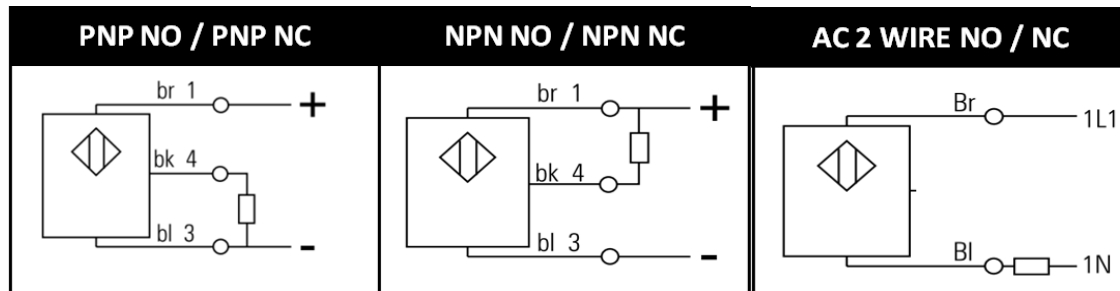

	Flush (Sn)	Non-Flush (Sn)	3 wire DC	2 wire AC
M12	2 mm	4 mm	✓	
M18	5 mm	8 mm	✓	✓
M30	10 mm	15 mm	✓	✓