


	3 wire DC	2 wire AC
Assured Sens. Sa	Sn x 0.8	
Sensitivity Adj.	Multi turn pot	
Body Material	Brass / SS / PBT	
Function	NO / NC	
Switching Freq.	100 Hz	25 Hz
Load Current	200 mA	400 mA
Output Indicator	LED	
Supply Voltage	10 ... 30 V DC	20 ... 250 V AC
SC Protection	Yes	
RP Protection	Yes	
Operating Temp.	-25 ... +70 deg C	
Protection	IP67	
Connection	M8 / M12 / 2 m PVC cable / Terminal Box	



Pictures for illustration only.  
Design and specifications subject to change without prior notice

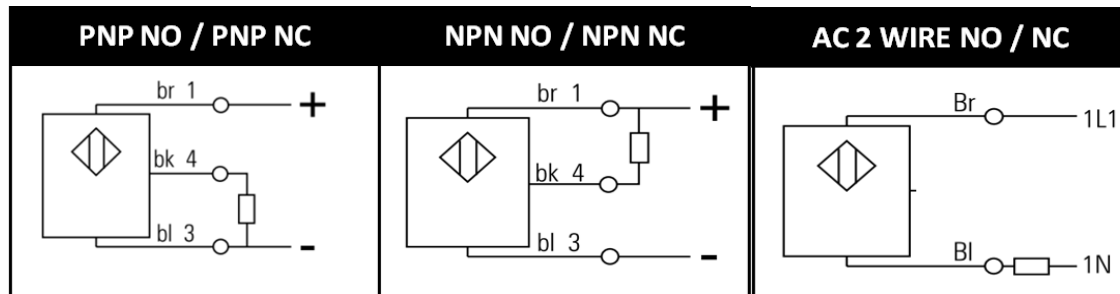

	Flush (Sn)	Non-Flush (Sn)	3 wire DC	2 wire AC
M08	2 mm	4 mm	✓	
M12	4 mm	8 mm	✓	
	6 mm	10 mm	✓	
M18	8 mm	15 mm	✓	✓
	12 mm	20 mm	✓	
M30	20 mm	30 mm	✓	✓
	25 mm	35 mm	✓	
40 x 40	20 mm	30 mm	✓	✓